


**63LC**  
**EN14439:2009 – Windzone C25**

ohne Klettereinrichtung

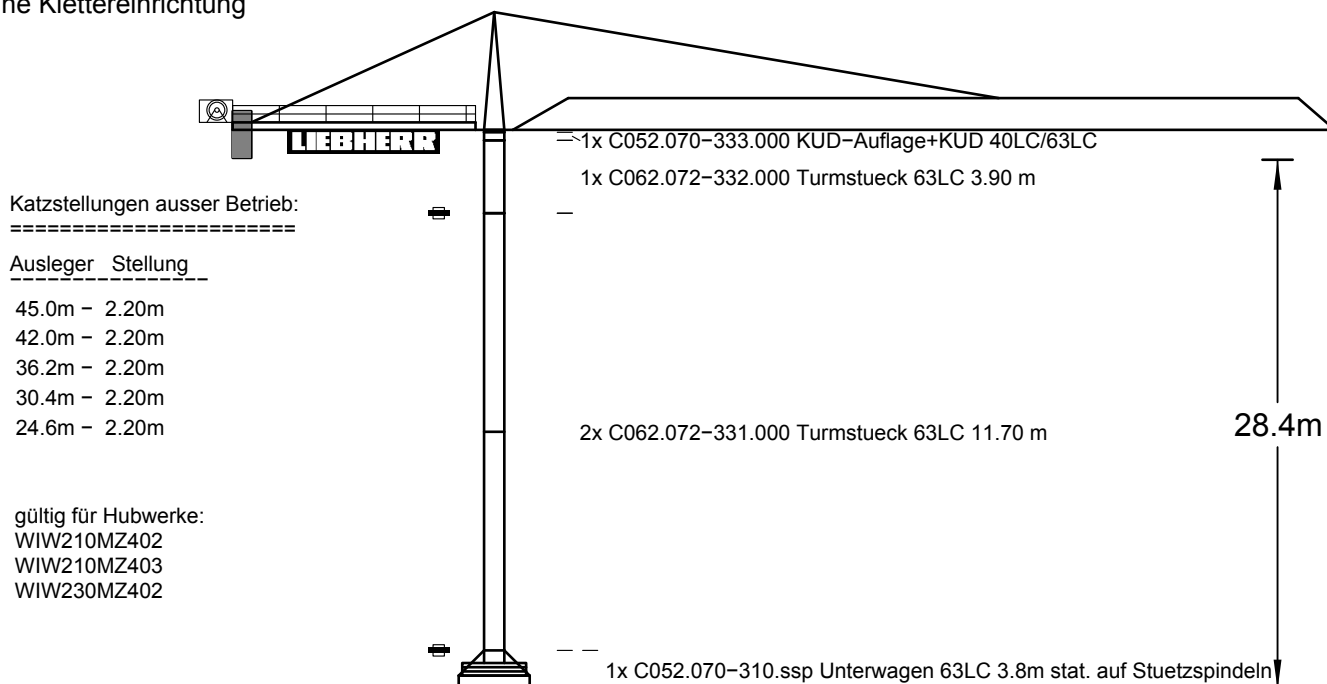

Hakenhoehe: 28.36 m      Spur: 3.80 m      Radstand: 3.80 m

Aus- ladung [m]	MD [kNm]	Zentral- ballast [to]	Eckdruecke in Betrieb [kN]					Eckdruecke ausser Betrieb [kN], MD = 0				
			Auslegerstellung				H.-kraft [kN]	Auslegerstellung				H.-kraft [kN]
			Ecke	1	2	3		Ecke	1	2	3	
45.00	119	30.000	A	160	258	63	27	A	147	242	52	62
			B	301	258	258		B	291	242	242	
			C	160	63	258		C	147	52	242	
			D	20	63	63		D	2	52	52	
42.00	112	30.000	A	160	263	57	27	A	146	235	58	62
			B	308	263	263		B	281	235	235	
			C	160	57	263		C	146	58	235	
			D	12	57	57		D	12	58	58	
36.20	88	35.000	A	169	279	60	26	A	156	242	69	62
			B	326	279	279		B	288	242	242	
			C	169	60	279		C	156	69	242	
			D	13	60	60		D	23	69	69	
30.40	68	35.000	A	166	279	53	25	A	152	240	65	62
			B	329	279	279		B	286	240	240	
			C	166	53	279		C	152	65	240	
			D	4	53	53		D	19	65	65	
24.60	44	35.000	A	162	273	51	24	A	148	232	65	62
			B	322	273	273		B	276	232	232	
			C	162	51	273		C	148	65	232	
			D	2	51	51		D	20	65	65	